




LEADCRETE

Hydroseeding Equipment

We full strive for shared NORMS and VALUES:

- Safety and Stringent quality control
- Maneuverability and Operator comfort
- Reliability
- Technical sophistication & after-sales full support

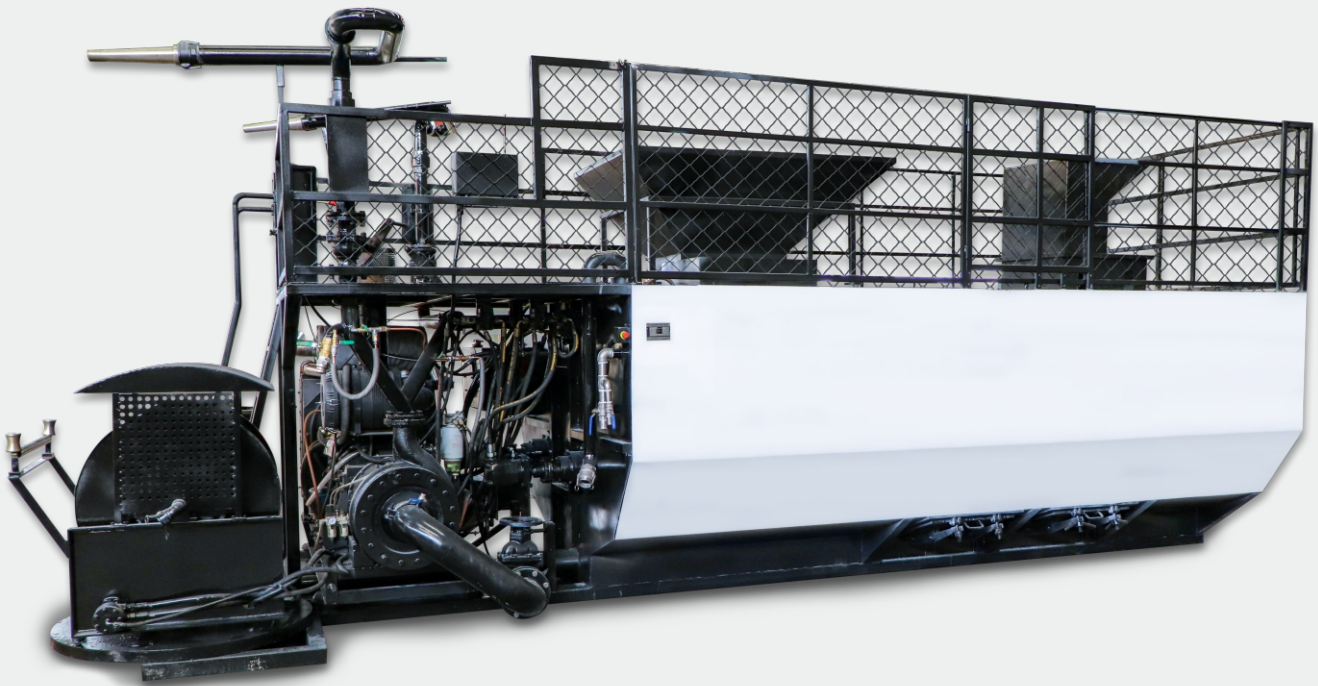

LEAD EQUIPMENT CO., LTD.

COMPANY PROFILE

Lead Equipment Co., Ltd. short name LEADCRETE, is a manufacturer specialized in R&D, manufacturer and sale of hydroseeding machine.

LHS series hydroseeding machine is driven by diesel engine, tank capacity has 2000L, 3000L, 6000L, 8000L, 13000L and 15000L tank capacity for option. They are with an exclusive pump to handle the thickest slurries.


Compared with other hydroseeders, LHS hydroseeding machine with following outstanding features:

- **Powerful diesel engine:** Cummins or Yuchai etc. famous brand diesel engine. Powerful, low fuel consumption, low maintenance cost. Powerful engine, ensure an evenly mixing and also improves the spraying efficiency.
- **Powerful mixing shaft:** Strong mixer shaft, also suitable for thick material.
- **High configurations:** 13000L or bigger hydroseeders with twin agitators, twin cannons etc.
- **High production:** Wear-resisting centrifugal pump, most efficient during working.
- **High density material:** Soil substrate, green grass seed, water retention agent, binder, fertilizer and water. The solids could up to 60%.
- **Long distance of spraying:** suitable for long and high spraying distance. Solids up to 60%, level distance could up to 100m by hose.
- **Hydraulic hose reel:** customize according to demands.
- **Extreme Efficiency:** Simple control panel, easy operation.
- **High quality structural steel:** More durable, a longer working life. Also have stainless steel tank and pipeline for option.

LHS hydroseeding machine is ideal equipment for ground & soil management, could be used for:

Seeding	Golf courses	Mine and oilfield reclamation
Erosion control	Turf	Fire suppression
Dust control	Land restoration	Forest fire recovery
Landfill cover	Roadside construction	Remote Watering
Landscaping	Pipelines	Fertilizing

MODEL DEFINITION

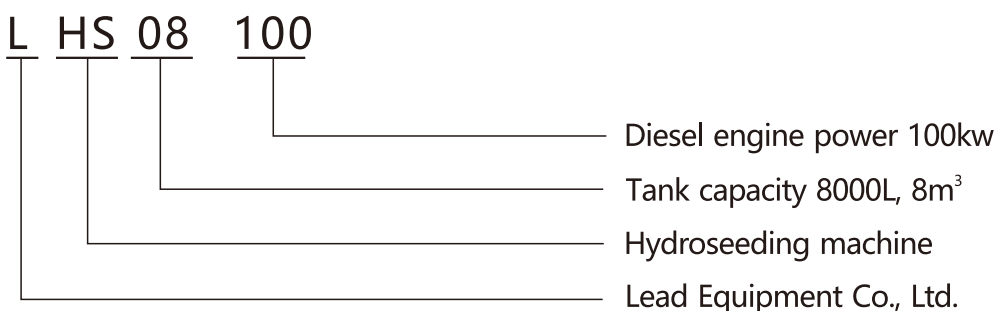

LHS15190 Hydroseeder

LHS15190 is a new, big capacity, wide applicability, simple operation and maintenance hydroseeder.

- More horsepower with high efficiency: 190kw Cummins diesel engine, Industrial grade Air-controlled large torque clutch;
- Specially design centrifugal pump: 6"x3", capacity 120m³/h;
- Spraying distance of up to 85m from cannon;
- Dual cannons design for spraying on both sides of the machine for hard-to reach areas;
- Swivelable hydraulic hose reel with reel in and reel out functionality;
- Twin mechanical agitators with helical paddle orientation and liquid recirculation;
- Removable hoppers for mulch hatch and normal fill well;
- Centralized electronic control to improve work efficiency;
- Wireless remote control make operate more easily during work.




Model	LHS15190
Power	190KW, Cummins engine, water-cooled
Tank Size	Liquid capacity: 15000L Working capacity: 13500L
Pump	Centrifugal pump:6"x3" (15.2X7.6cm), 120m ³ /h@14bar, 32mm solid clearance
Agitation	Twin mechanical agitators with helical paddle orientation and liquid recirculation
Rotating speed of mixer shaft	0-130rpm
Maximum horizontal conveying distance	85m
Spraying guns type	fixed standing gun and pipe gun
Height of fence	1100mm
Dimensions	7200x2500x2915mm
Weight	8500kg
Options	Stainless steel material for whole unit Hose Reel with hose Remote control unit

LHS13190 Hydroseeder

LHS13190 is a new, big capacity, wide applicability, simple operation and maintenance hydroseeder.

- More horsepower with high efficiency: 190kw Cummins diesel engine, Industrial grade Air-controlled large torque clutch;
- Specially design centrifugal pump: 6"x3", capacity 120m³/h;
- Spraying distance of up to 85m from cannon;
- Dual cannons design for spraying on both sides of the machine for hard-to reach areas;
- Swivelable hydraulic hose reel with reel in and reel out functionality;
- Twin mechanical agitators with helical paddle orientation and liquid recirculation;
- Removable hoppers for mulch hatch and normal fill well;
- Centralized electronic control to improve work efficiency;
- Wireless remote control make operate more easily during work.

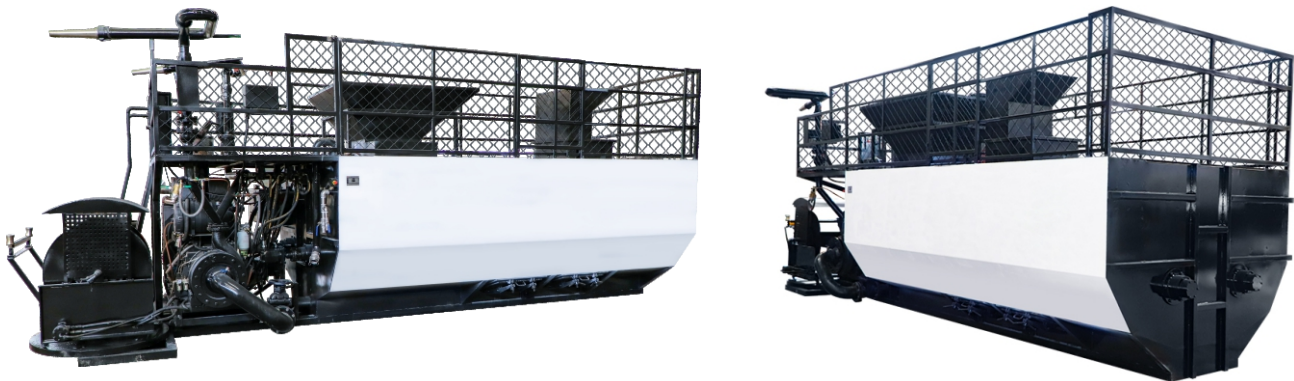

Model	LHS13190
Power	190KW, Cummins engine, water-cooled
Tank Size	Liquid capacity: 13000L Working capacity: 11700L
Pump	Centrifugal pump:6"x3" (15.2X7.6cm), 120m ³ /h@14bar, 32mm solid clearance
Agitation	Twin mechanical agitators with helical paddle orientation and liquid recirculation
Rotating speed of mixer shaft	0-130rpm
Maximum horizontal conveying distance	85m
Spraying guns type	fixed standing gun and pipe gun
Height of fence	1100mm
Dimensions	7200x2500x2915mm
Weight	8000kg
Options	Stainless steel material for whole unit Hose Reel with hose Remote control unit

LHS08100A Hydroseeder

LHS08100A hydroseeder is the most robust member of our hydroseeder family designed to meet the needs of middle-scale jobsites and demanding seeding applications. This unit has the power and output capacity to handle middle size mine reclamation, highways, and commercial sites with new conveniences, greater versatility and increased operator efficiencies.

- Air controlled clutch, high safety factor and long service life.
- Mechanical paddle agitator, convenient to use, high transmission efficiency, easy maintenance.
- Diesel engine drive, low fuel consumption, convenient operation and easy maintenance.
- 360° degree freely rotating universal nozzle, long nozzle, short nozzle and fan-shaped nozzles, convenient to exchange according to different working surfaces.
- Hydraulic driven hose reel with 60 meters hose capacity.
- Special designed slurry centrifugal pump, spraying distance up to 70m.




Model	LHS08100A
Power	103KW @ 220rpm
Tank Size	Liquid capacity: 8000L (2114gallon)
Pump	Centrifugal pump:5"x2" (12.7X6.4cm), 100m ³ /h(440gpm)@ 10bar (145psi), 1" (2.5cm) solid clearance
Pump drive	In-line coupled to air-controlled over-center clutch, pump drive is independent of agitator operation
Agitation	Mechanical paddle agitators and liquid recirculation
Agitator drive	Reversible, variable speed hydraulic motor drive (0-130rpm)
Discharge distance	Up to 70m (230ft) from discharge tower
Hose reel	Hydraulic driven with reversible, variable speed
Dimensions	5875x2150x2750mm
Weight	4850kg
Options	Stainless steel material for whole unit Hose Reel with hose Remote control unit

LHS08100 and LHS06100 Hydroseeder

LHS08100 and LHS06100 are designed for mid to larger-sized hydroseeding projects. From large residential and commercial properties, highway roadsides, industrial parks, sports fields, mine reclamation sites and more, the two types are an economical choice for performance and production.

- More horsepower with high efficiency: 104kw Cummins diesel engine, Industrial grade Air-controlled large torque clutch;
- With engine protection door and ventilation;
- Specially design centrifugal pump: 5"x3", capacity 90m³/h;
- Spraying distance of up to 70m from cannon;
- Swivelable hydraulic hose reel with reel in and reel out functionality;
- Agitator with helical paddle orientation and liquid recirculation;
- With ground level control box with start and stop controls;
- With emergency stop button on top and ground level to shutdown engine in emergency;
- With 100L clean water flush tank.

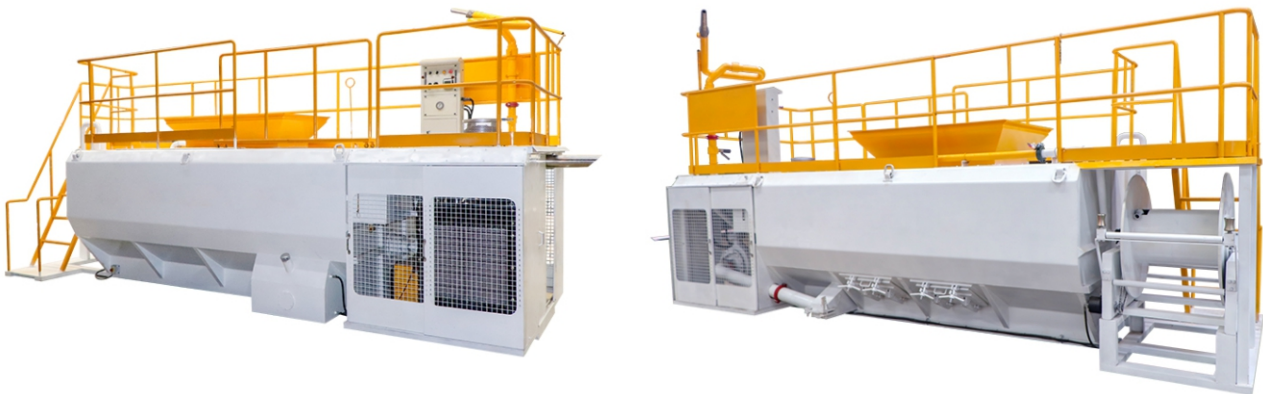

Model	LHS08100	LHS06100
Power	100KW, Cummins engine, water-cooled	
Tank Size	Liquid capacity: 8000L Working capacity: 7300L	Liquid capacity: 6000L Working capacity: 5500L
Pump	Centrifugal pump:5"x3" (12.6X7.6cm), 90m ³ /h@11bar, 20mm solid clearance	
Agitation	mechanical agitator with helical paddle orientation and liquid recirculation	
Rotating speed of mixer shaft	0-110rpm	
Maximum horizontal conveying distance	70m	
Spraying guns type	fixed standing gun and pipe gun	
Height of fence	1100mm	
Dimensions	5800x2100x2750mm	
Weight	5000kg	4500kg
Options	Stainless steel material for whole unit Remote control unit	
		Hose Reel with hose

LHS0883 and LHS0683 Hydroseeder

LHS0883 and LHS0683 are designed for mid to larger-sized hydroseeding projects. From large residential and commercial properties, highway roadsides, industrial parks, sports fields, mine reclamation sites and more, the two types are an economical choice for performance and production.

- 83kw China brand diesel engine, electromagnetic clutch;
- Specially design centrifugal pump: 5"x2.5", capacity 80m³/h;
- Spraying distance of up to 65m from cannon;
- Agitator with helical paddle orientation and liquid recirculation.



Model	LHS0883	LHS0683
Power	83KW, China Yuchai diesel engine, water-cooled	
Tank Size	Liquid capacity: 8000L Working capacity: 7300L	Liquid capacity: 6000L Working capacity: 5500L
Pump	Centrifugal pump:5"x2.5" (12.6X6.3cm), 80m ³ /h@10bar, 20mm solid clearance	
Agitation	mechanical agitator with helical paddle orientation and liquid recirculation	
Rotating speed of mixer shaft	0-110rpm	
Maximum horizontal conveying distance	65m	
Spraying guns type	fixed standing gun and pipe gun	
Height of fence	1100mm	
Dimensions	5800x2150x2750mm	
Weight	5000kg	4500kg
Options	Stainless steel material for whole unit Remote control unit	Hose Reel with hose Trailer

LHS0353 Hydroseeder

LHS0353 is one mid-size hydroseeding machine what used for large residential and commercial projects, apartment, office building, industrial parks and more other efficient, cost effective and profitable applications.

- 53kw China brand diesel engine, water-cooled;
- Specially design centrifugal pump: 4"x2", capacity 70m³/h;
- Spraying distance of up to 60m from cannon;
- With hydraulic hose reel with reel in and reel out functionality;
- Agitator with helical paddle orientation and liquid recirculation.



Model	LHS0353
Power	53KW, China Yuchai diesel engine, water-cooled
Tank Size	Liquid capacity: 3000L Working capacity: 2550L
Pump	Centrifugal pump:4"x2" (10X5cm), 70m ³ /h@7bar, 10mm solid clearance
Agitation	mechanical agitator with helical paddle orientation and liquid recirculation
Rotating speed of mixer shaft	0-110rpm
Maximum horizontal conveying distance	60m
Spraying guns type	fixed standing gun and pipe gun
Height of fence	1100mm
Dimensions	3350x2030x2600mm 4800x2100x2900mm with trailer
Weight	2950kgs/3500kgs with trailer
Options	Stainless steel material for whole unit Remote control unit
	Hose Reel with hose Trailer

LHS0230 Hydroseeder

LHS0230 is one hydroseeding machine for small to mid-size hydroseeding projects on residential and commercial projects, sports fields, apartment and office buildings, golf courses, parks and more other efficient, cost effective and profitable applications.

- 30kw China brand diesel engine, water-cooled/Air cooled;
- Specially design centrifugal pump: 3"x1.5", capacity 45m³/h;
- Spraying distance of up to 50m from cannon;
- With hydraulic hose reel;
- Agitator with helical paddle orientation and liquid recirculation.

Model	LHS0230	
Power	30KW, Chinese brand engine, water-cooled	
Tank Size	Liquid capacity: 2000L Working capacity: 1700L	
Pump	Centrifugal pump:3"x1.5" (7.5X3.75cm), 45m ³ /h@5bar, 10mm solid clearance	
Agitation	mechanical agitator with helical paddle orientation and liquid recirculation	
Rotating speed of mixer shaft	0-110rpm	
Maximum horizontal conveying distance	50m	
Spraying guns type	fixed standing gun and pipe gun	
Height of fence	1100mm	
Dimensions	3350x2030x2600mm 4800x2100x2900mm with trailer	
Weight	2950kgs/3500kgs with trailer	
Options	Stainless steel material for whole unit Remote control unit	Hose Reel with hose Trailer

Model	Power	Tank Size	Pump	Agitation	Rotating speed of mixer shaft	Maximum horizontal conveying distance	Dimensions	Weight
LHS15190	190KW, Cummins engine, water-cooled	Liquid capacity: 15000L Working capacity: 13500L	Centrifugal pump: 6"x3" (15.2X7.6cm), 120m ³ /h@14bar, 32mm solid clearance	Twin mechanical agitators with helical paddle orientation and liquid recirculation	0-130rpm	85m	7200x2500x2915mm	8500kg
		Liquid capacity: 13000L Working capacity: 11700L					7200x2500x2915mm	8000kg
LHS08100A	103KW, Diesel engine, water-cooled	Liquid capacity: 8000L	Centrifugal pump: 5"x2-1/2" (12.7X6.4cm), 100m ³ /h@10bar, 25mm solid clearance		0-130rpm	70m	5875x2150x2750mm	4850kg
LHS08100	100KW, Cummins engine, water-cooled	Liquid capacity: 8000L Working capacity: 7300L	Centrifugal pump: 5"x3" (12.6X7.6cm), 90m ³ /h@11bar, 20mm solid clearance			70m	5800x2100x2750mm	5000kg
		Liquid capacity: 6000L Working capacity: 5500L					5800x2100x2750mm	4500kg
LHS0883	83KW, Chinese brand engine, water-cooled	Liquid capacity: 8000L Working capacity: 7300L	Centrifugal pump: 5"x2.5" (12.6X6.3cm), 80m ³ /h@10bar, 20mm solid clearance	Mechanical agitator with helical paddle orientation and liquid recirculation	0-110rpm	65m	5800x2150x2750mm	5000kg
		Liquid capacity: 6000L Working capacity: 5500L					5800x2150x2750mm	4500kg
LHS0353	53KW, Chinese brand engine, water-cooled	Liquid capacity: 3000L Working capacity: 2550L	Centrifugal pump: 4"x2" (10X5cm), 70m ³ /h@7bar, 10mm solid clearance			60m	3350x2030x2600mm	2950kg
		Liquid capacity: 2000L Working capacity: 1700L	Centrifugal pump: 3"x1.5" (7.5X3.75cm), 45m ³ /h@5bar, 10mm solid clearance				3350x2030x2600mm	2950kg
LHS0230	30KW, Chinese brand engine, water-cooled	Liquid capacity: 2000L Working capacity: 1700L	Centrifugal pump: 3"x1.5" (7.5X3.75cm), 45m ³ /h@5bar, 10mm solid clearance			50m	3350x2030x2600mm	2950kg

Options: Stainless steel material for whole unit, Hose Reel with hose, Remote control unit, Trailer etc.



Lead Equipment Co., Ltd.

Xisihuan Ring-Road East, Tielu, Xiliu Lake sub-district,

Zhongyuan District, Zhengzhou, Henan China

P.C.: 450000 Tel: +86-371-63902781

Mobile/WhatsApp/Viber: +86-18538591025

Fax: +86-371-63526675

Email: sales@leadcrete.com

Website: www.leadcrete.com/www.leadcrete.net

