



LMP40/10-H Plaster Pump

Specification: this pump is designed as the combination of LH38-430 hose pump (peristaltic type), mini air compressor and frequency converter.


LH38-430 HEAVY-DUTY HOSE PUMP TECHNICAL DATA

Item	Description	Remarks
Rotor Dia.(D)	430mm	
Hose ID	38mm/1.5inch	
Rotor Rev.	15-33rpm	
Rated Output/Flow	18-40L/min	
Rated pressure	10 bar	
Motor Power	3 KW /4hp, 3 phase, 380v, 50 Hz,IP55	*
Suck lift	5 meter	
Hose material	NR(Natural Rubber)	
Overall Dimension	1600x800x1060mm	
Weight	440kg	

Note: 1,the gearbox is heavy -duty Helical-bevel gear
2,*WEG or China domestic electric motor

LH38-430

净功率/Net motor power(KW)

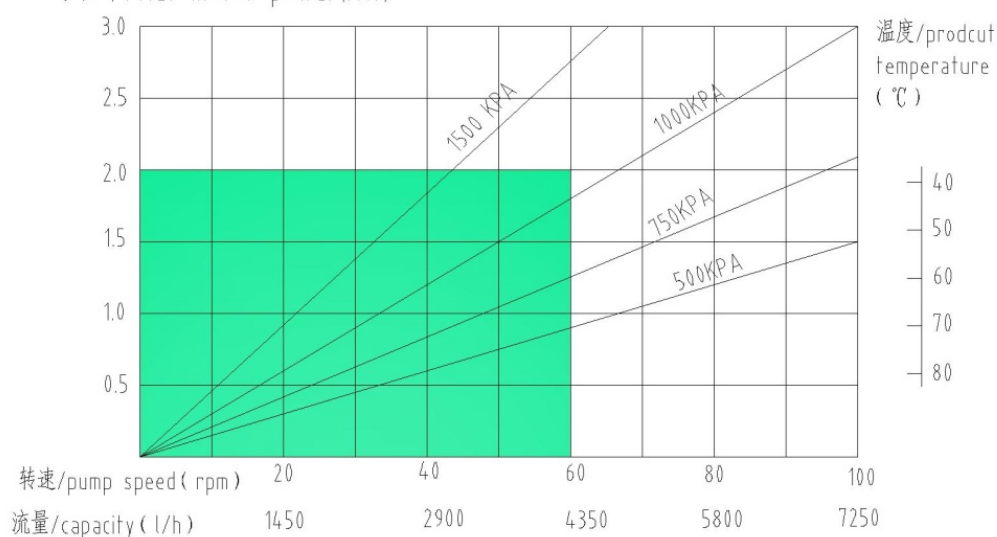

连续工况(Continuous duty)

间歇工况(Intermittent duty)

Plaster Pump

1. Rigid tooth flank helical gear
2. Nozzle specially design to get continuous spaying flow
3. Mini air compressor


Mini Air Compressor	
Rated output	300L/min
Rated pressure	7 bar



Frequency Converter	
The basic version is one made in China, if you need Siemens, SEW or ABB, please check it from us.	



Gearbox	
Rigid tooth flank helical gear	



Nozzle	
Specially design to get continuous spaying flow	



A complete set of LMP40/10-H plaster pump

No.	Description	Qty.	Unit	Remarks
1	LMP40/10-H main unit	1	set	
2	Pump squeeze tube	1	pcs	
3	Conveying hose, ID38, length 10 meter	2	pcs	
4	Nozzle Assy.	1	set	
5	Nozzle Tip	1	pcs	
6	Accessories	1	set	

Certificate:

CE AND ISO9001-2008



Pictures:



LEAD EQUIPMENT CO., LTD. PRODUCT E-CATALOG

Clamp:



Rubber gasket:



Clean ball:



Zhengzhou Lead Equipment Co., Ltd.

Add: Xisihuan Ring-Road East, Tielu, Xiliu lake sub-district,
Zhongyuan District, Zhengzhou, Henan

Web: <http://www.leadcrete.com> E-Mail: sales@leadcrete.com

TEL: +86-371-63902781 FAX: +86-371-63526676