


Single Acting Electric Oil Pump for Cylinder Jack

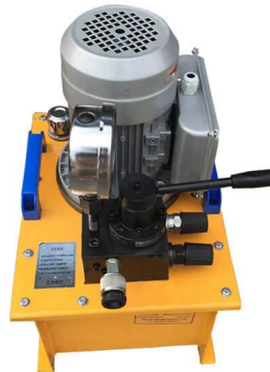

Description

Single acting electric oil pump for cylinder jack is made of electric motor, low pressure oil pump, high pressure oil pump and oil box. Small dimension, high pressure, light weight, simple structure, and it has a spare joint for connecting oil gauge.

If the single acting electric oil pump is matched with other hydraulic tools, it can supply driven for lifting, profiling, bending pipe, straightening, tearing down, cutting, installing, gauging pipe, punching and etc. It can reduce labor strength and increase working efficiency.

Single acting electric oil pump for cylinder jack is single outlet, high-low pressure pump, parallel type hydraulic power pack, high-low pressure pump supply oil at the same time when low pressure, it can get the large output flow; low pressure pump automatically unloading back the oil via control valve when high pressure, it can reduce the consumption of electric motor and heat of oil, it has the function of stop machine to protect pressure, single oil-way backing oil and etc.

Application

- 1) Single acting electric oil pump for cylinder jack is matched with other hydraulic tools, it can supply driven for lifting, profiling, bending pipe, straightening, tearing down, cutting, installing, gauging pipe, punching and etc.
- 2) Single acting electric oil pump for cylinder jack also can be installed into some machines for supplying power packs.
- 3) Single acting electric oil pump for cylinder jack as a test pressure pump station for kinds of high pressure hydraulic components, high pressure container, high pressure rubber hose.



郑州佰利得机器制造有限公司

Zhengzhou Lead Equipment Co., Ltd.

地址 ADD: 郑州市中原区西流湖街道办事处铁炉村西四环东 邮编 P.C.:450042
Xisihuan Ring-Road East, Tielu, Xiliu lake sub-district,
Zhongyuan District, Zhengzhou, Henan

网址 (Web): <http://www.leadcrete.com> E-Mail: sales@leadcrete.com

电话 TEL: +86-371-63902781 传真 FAX: +86-371-63526676

Features

- 1) Single acting electric oil pump for cylinder jack small dimension, light weight, convenient usage, high working pressure.
- 2) Single stage pump station: simple structure, it can get higher working pressure.
- 3) Double stage pump station: high-low pressure pump supply oil at the same time when low pressure, it can get the large output flow; low pressure pump automatically unloading back the oil via control valve when high pressure, it can reduce the consumption of electric motor.
- 4) Holding function: at the condition that outer oil-way is no reveal, stop the pump for holding 5 minters, rated pressure reduce less than 5Mpa.

Technical data

Single acting electric oil pump

Model	Working pressure	Low pressure	High pressure flow	Low pressure flow	Power	Voltage	Oil capacity
	Mpa	Mpa	L/min	L/min	Kw	V	L
ZB-0.55	63	2	0.4	1	0.55	380/220	7
ZB-0.75	63	2	0.7	2.4	0.75	380/220	16
ZB-1.5	63	2	1	6	1.5	380/220	26
ZB-2.2	63	2	2.4	6	2.2	380/220	42
ZB-3	63	2	3	6	3	380/220	42
ZB-4	63	2	4	9	4	380/220	60
ZB-5.5	63	2	6	9	5.5	380/220	90
ZB-7.5	63	2	7	9	7.5	380/220	120
ZB-11	63	2	9	15	11	380/220	150



郑州佰利得机器制造有限公司

Zhengzhou Lead Equipment Co., Ltd.

地址 ADD: 郑州市中原区西流湖街道办事处铁炉村西四环东
Xisihuan Ring-Road East, Tielu, Xiliu lake sub-district,
Zhongyuan District, Zhengzhou, Henan

邮编 P.C.:450042

网址 (Web): <http://www.leadcrete.com> E-Mail: sales@leadcrete.com

电话 TEL: +86-371-63902781 传真 FAX: +86-371-63526676



Zhengzhou Lead Equipment Co., Ltd.

Add: Xisihuan Ring-Road East, Tielu, Xiliu lake sub-district,
Zhongyuan District, Zhengzhou, Henan

Web: <http://www.leadcrete.com> E-Mail: sales@leadcrete.com

TEL: +86-371-63902781 FAX: +86-371-63526676