


LH89-610C Industrial Hose Squeeze Pump for Sale

Working principle:

LEC heavy-duty industries hose pump is a kind of peristaltic pump. An elastomeric tube is squeezed along a length by rollers that push the fluid contained within. The tube's restitution after squeezing produces a vacuum that draws fluid continuously into the tube. This creates a gentle pumping action that doesn't cause any damage to the product. Contaminations are avoided because the fluid is contained within the tube. The pump employs a rotor with rollers mounted on it that continually compress and occlude some portion of the tube. This action moves the fluid through the tube with a constant rate of displacement for each revolution of the rotor, enabling a precise measurement of the volume of fluid pumped through the tube.

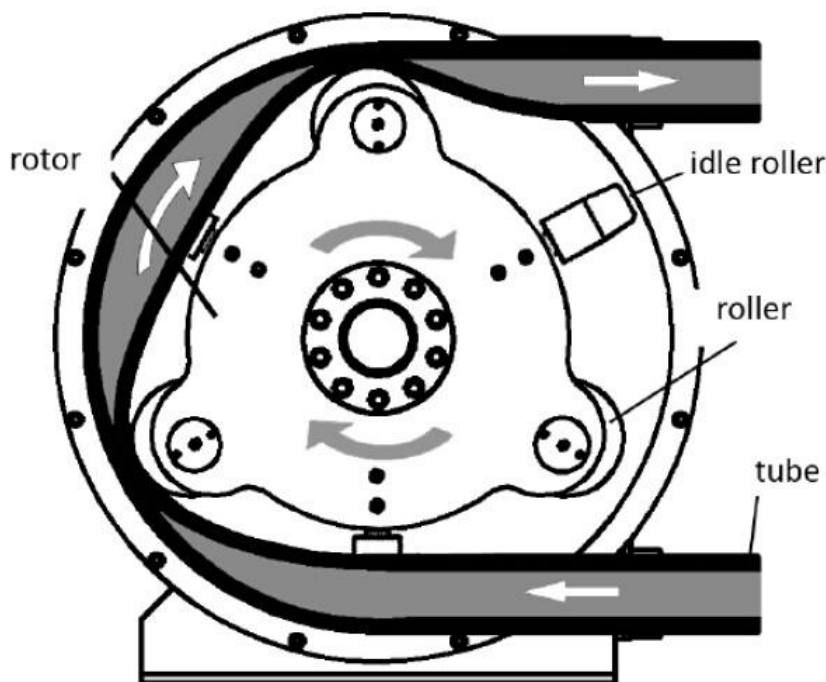

地址 ADD : 郑州市中原区西流湖街道办事处铁炉村西四环东
Xisihuan Ring-Road East, Tielu, Xiliu lake sub-district,
Zhongyuan District, Zhengzhou, Henan


邮编 P.C.:450042

网址 (Web) :<http://www.leadcrete.com> E-Mail: sales@leadcrete.com

电话 TEL : +86-371-63902781 传真 FAX:+86-371-63526676

Pump Features:

- Reversibility
- Seallessness and valveless
- Abrasion resistance
- Self priming with high suction
- With 1% repeat precision
- Corrosion-resistant
- Easy to clean
- Can run dry without damage
- Peristaltic tube is the only consumption part

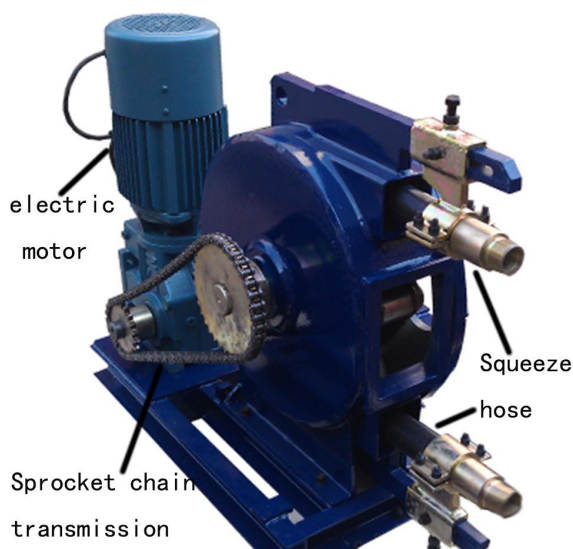

地址 ADD : 郑州市中原区西流湖街道办事处铁炉村西四环东
Xisihuan Ring-Road East, Tielu, Xiliu lake sub-district,
Zhongyuan District, Zhengzhou, Henan

邮编 P.C.:450042

网址 (Web) : <http://www.leadcrete.com> E-Mail: sales@leadcrete.com



电话 TEL : +86-371-63902781 传真 FAX: +86-371-63526676

LH89-610C Hose Pump Specification:

| | |
|-----------------|---------------------|
| Type | LH89-610C |
| Max. ouput | 240L/min |
| Rotation | 45RPM |
| Squeeze hose ID | 89mm |
| Max. pressure | 1.0Mpa |
| Voltage | 3 phase, 380V, 50HZ |
| Power | 22KW |

Pictures:

1) the comparison of pump core

| Common pump core | LEC pump core |
|---|--|
|  |  |

2) There are three types squeeze hose for choose

| | | |
|----------------------|-------------------------|-------------------------|
| Chinese squeeze hose | Trelleborg squeeze hose | Enviroflex squeeze hose |
|----------------------|-------------------------|-------------------------|



郑州佰利得机器制造有限公司

Zhengzhou Lead Equipment Co., Ltd.

地址 ADD : 郑州市中原区西流湖街道办事处铁炉村西四环东
Xisihuan Ring-Road East, Tielu, Xiliu lake sub-district,
Zhongyuan District, Zhengzhou, Henan

邮编 P.C.:450042

网址 (Web) :<http://www.leadcrete.com> E-Mail: sales@leadcrete.com

电话 TEL : +86-371-63902781 传真 FAX:+86-371-63526676



3) The transmission type



A- cycloidal pinwheel reducer gear box



B- spiral bevel gear (SEW series)



C- sprocket chain transmission

4) LH89-610C pump in difference angles



郑州佰利得机器制造有限公司

Zhengzhou Lead Equipment Co., Ltd.



地址 ADD : 郑州市中原区西流湖街道办事处铁炉村西四环东

邮编 P.C.:450042

Xisihuan Ring-Road East, Tielu,Xiliu lake sub-district,
Zhongyuan District, Zhengzhou,Henan

网址 (Web) :<http://www.leadcrete.com> E-Mail: sales@leadcrete.com

电话 TEL : +86-371-63902781 传真 FAX:+86-371-63526676

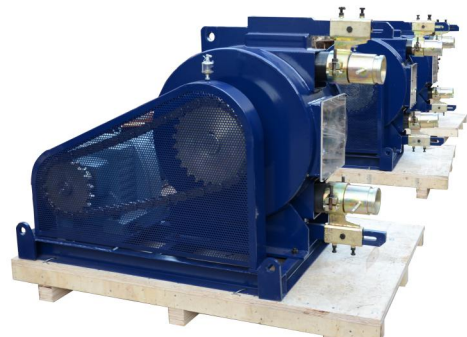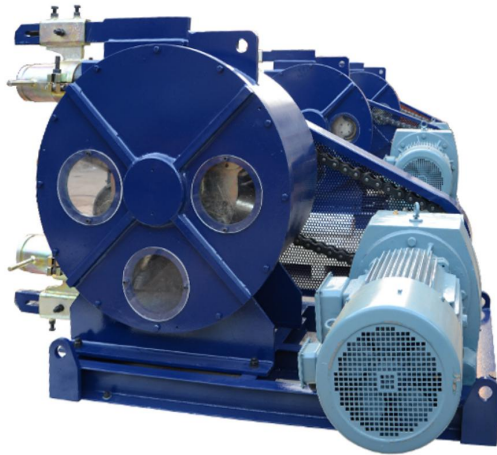

Zhengzhou Lead Equipment Co., Ltd.

Add : Xisihuan Ring-Road East, Tielu,Xiliu lake sub-district,

Zhongyuan District, Zhengzhou,Henan

Web:<http://www.leadcrete.com> E-Mail: sales@leadcrete.com

TEL: +86-371-63902781 FAX:+86-371-63526676